

## GV-FEC5302



### Key Features


- 1/2.5" progressive scan CMOS
- Up to 15 fps at 2048 x 1944, 5 fps at 2560 x 1920
- Cloud storage
- YouTube live streaming
- Day and night (with removable IR-cut filter)
- Vandal resistance (IK10+ for metal casing)
- Built-in microphone and speaker
- 12V DC / 24V AC / PoE (IEEE 802.3af)
- Built-in micro SD card slot (SD/SDHC) for local storage
- Two-way audio
- Digital Object Tracking
- Provides 360° and 180° panorama view
- No mechanical moving parts
- Tampering alarm
- Virtual PTZ function
- Auto Pan function
- Wide Dynamic Range (WDR)
- Dual streams from H.264
- Defog
- Recording upon motion detection

## Introduction

GV-FEC5302 is an indoor fisheye camera that allows you to monitor all angles of a location. It can be installed to the ceiling and wall. The camera's distorted hemispherical image can be converted into a conventional rectilinear projection. When motion is detected, the camera saves the surveillance videos in the micro SD card, which can be stored in GeoVision's cloud storage.

There are three ways to remotely access GV-Cloud Cameras from your PC and mobile devices. You can watch live view and play back recordings of multiple GV-Cloud Cameras.

- **myGVcloud Portal:** Log in [www.mygvcloud.com](http://www.mygvcloud.com) using Web browsers on PC
- **myGVcloud CamAPP:** Install myGVcloud CamAPP on Android or iOS mobile devices
- **myGVcloud Camapp Android TV:** Install myGVcloud CamAPP Android TV on Android TV devices.

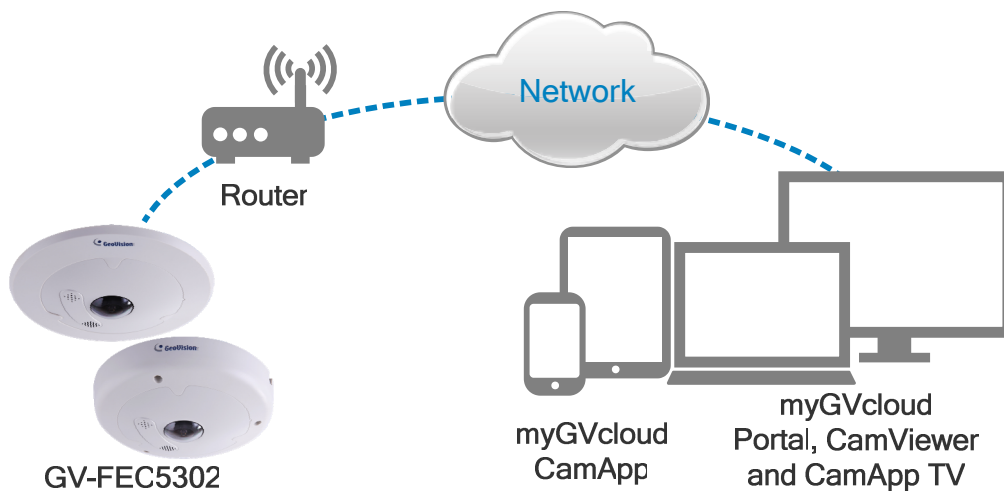

Photos

Fisheye Source Image



Single View



2 x 180° View



360° View




Quad View




## Dimensions

- Camera Cover for Hard Ceiling Mount

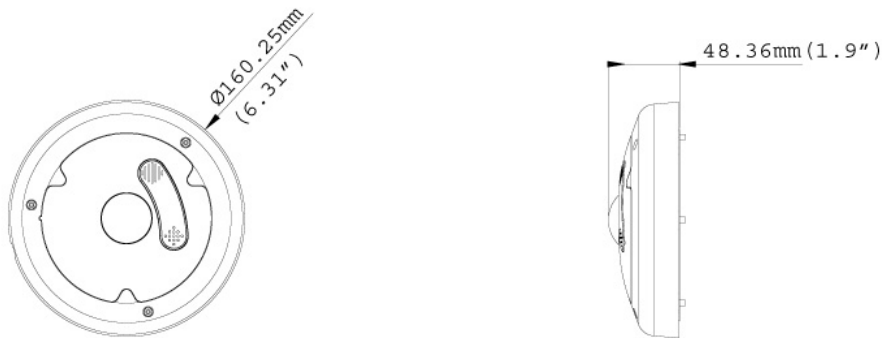

- Camera Cover for In Ceiling Mount

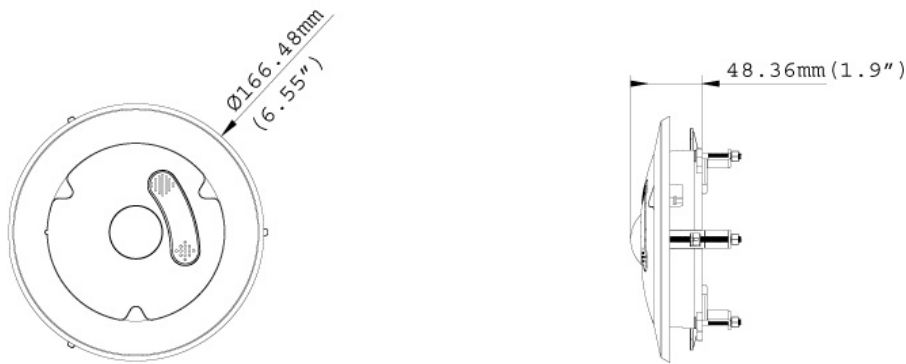

## Specifications

Camera		
Image Sensor	1/2.5" progressive scan CMOS	
Picture Elements	2560 (H) x 1920 (V)	
Minimum Illumination	Color	0.15 Lux
	B/W	0.10 Lux
	IR On	0 Lux
Shutter Speed	Automatic, Manual (1/5, 1/15, 1/30, 1/60 sec)	
White Balance	Automatic, Manual (2800K ~ 8500K)	
Gain Control	Automatic	
S/N Ratio	45 dB	
WDR	Yes	
Optics Lens		
Megapixel	Yes	
Day/Night	Yes (with removable IR-cut filter)	
Lens Type	Fixed	
Focal Length	1.32 mm	
Maximum Aperture	F/2.0	
Mount	M12, Pitch 0.5 mm	
Image Format	2.5"	
Horizontal FOV	180°	
Optics Lens	Focus	Fixed
	Zoom	Fixed
	Iris	Fixed

Operation		
Video Compression	H.264	
Video Streaming	Dual streams from H.264	
Frame Rate	5 fps at 2560 x 1920, 15 fps at 2048 x 1944 * The frame rate and performance may vary depending on the number of connections and data bitrates (different scenes).	
Image Setting	myGVcloud Portal	Sharpness, D/N Sensitivity, White Balance, Flicker-less, Image Orientation, Shutter Speed, Image Setting Wide Dynamic Range (WDR), Defog
	Camera Web Interface	D/N Sensitivity, Backlight Compensation
Audio Compression	AAC (16 kHz / 16 bit)	
Audio Support	Two-Way Audio	
Video Resolution		
Main Stream	2560 x 1920, 2048 x 1944	
Sub Stream	640 x 480, 640 x 608, 320 x 240, 320 x 304	
Network		
Interface	10/100 Ethernet	
Protocol	HTTP, HTTPS, TCP, UDP, DHCP, NTP, UPnP * The signal range and data throughput may vary depending on the network conditions and environmental factors.	
Mechanical		
Temperature Detector	Yes	
Connectors	Power	2-pin terminal block, PoE
	Ethernet	Ethernet (10/100 Base-T), RJ-45 Connector
	Audio	1 In (built-in microphone) 1 Out (built-in speaker or stereo phone jack, 3.5 mm / 0.14")
	Digital I/O	None
	Auto Iris	None
	Local Storage	Micro SD card slot (SD/SDHC, SD version 2.0 only, Class 10) * SDXC and UHS-I card types are not supported.
General		
Environment Temperature	0°C ~ 50°C (32°F ~ 122°F)	
Humidity	10% to 90% (no condensation)	
Power Source	12V DC / 24V AC / PoE (IEEE 802.3af)	
Max. Power Consumption	8.6 W	
Dimension	Hard-Ceiling Mount	Ø 160.25 x 48.36 mm (6.31" x 1.93")
	In-Ceiling Mount	Ø 166.48 x 48.36 mm (6.55" x 1.93")
Weight	410 g (0.9 lb)	
Vandal Resistance	IK10+ for metal casing	
Regulatory	CE, FCC, RCM, RoHS compliant	
Power over Ethernet		
PoE Standard	PoE (IEEE 802.3af Power over Ethernet / PD)	
PoE Power Supply Type	End-Span	
PoE Power Output	Per Port 48V DC, 350mA. Max. 15.4 watts	
Applications		
Installation	myGVcloud CamWizard	
Access from Web Browser using myGVcloud Portal	Camera live view, video recording, change video resolution, image snapshot, motion detection, Picture -in-Picture, Picture-and-Picture, Cloud Service, Youtube live streaming	
Live Viewing	Web browser (myGVcloud Portal), PC (myGVcloud CamViewer), Mobile app (myGVcloud CamAPP), Smart TV (myGVcloud CamApp Android TV)	
Storage Management	Cloud storage through myGVcloud Portal	
Firmware Upgrade	Through myGVcloud Portal or camera Web interface	
Mobile Phone Support	myGVcloud CamAPP for iOS and Android devices	



Smart TV Support	myGVcloud CamApp Android TV
Language	Bulgarian / Czech / English / German / Hungarian / Japanese / Russian / Traditional Chinese

**Note:**

1. Specifications are subject to change without notice.
2. Do not use clothes or any ordinary material to clean the camera cover since it may result in scratches on the cover.
3. Mind the following when using an inserted memory card for recording:
  - Recorded data on the memory card can be damaged or lost if the data are accessed while the camera is under physical shock, power interruption, memory card detachment or when the memory card reaches the end of its lifespan. No guarantee is provided for such causes.
  - The stored data can be lost if the memory card is not accessed for a long period of time. Back up your data periodically if you seldom access the memory card.
  - Memory cards are expendable and their durability varies according to the conditions of the installation site and how they are used. Back up your data regularly and replace the memory card annually.
  - Replace the memory card when its read/write speed is lower than 6 MB/s or when the memory card is frequently undetected by the camera.
  - Use Micro SD card of MLC NAND flash, Class 10 for better performance.

**Packing List**

- |                                      |  |
|--------------------------------------|--|
| 1. GV-FEC5302                        | 8. Torx Wrench                               |
| 2. Camera Cover (Hard Ceiling Mount) | 9. Installation Sticker                      |
| 3. Screw (Hard Ceiling Mount) x 3    | 10. DC 12V Power Adapter                     |
| 4. Plastic Screw Anchor x 3          | 11. 8 GB micro SD card (MLC, SDHC, Class 10) |
| 5. Camera Cover (In-Ceiling Mount)   | 12. Ethernet Cable                           |
| 6. Screw (In-Ceiling Mount) x 3      | 13. myGVcloud Quick Start Guide              |
| 7. Support Bracket x 3               |  |

**Note:** The micro SD card is provided as a complimentary item without warranty.